




ALIASING TEST CHART

REFLECTANCE

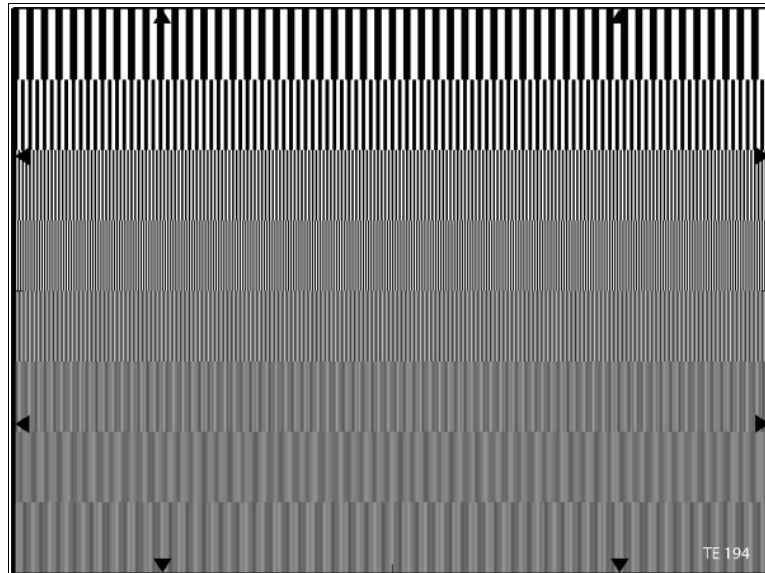

Aliasing effects are moiré distortions caused by interferences of two rasters. Independent of the type of camera aliasing effects can arise by interferences of motive rasters and the TV line structure e.g. the well known venetian blind effect or textile stripe patterns.

CCD cameras have a special immanent aliasing problem caused by the spatial image sampling. The spectrum of the signal obtained at the camera output is compromised of a basic spectrum repeated around multiples of the CCD sampling frequency. The CCD sampling frequency depends on the CCD size and the number of the pixels per CCD width. For some high spatial frequencies of the image, the condition dictated by sampling theorem is not met, so that the basic spectrum and duplicated spectrum can be superimposed and give rise to inter-frequency beats. The result is moiré in the pictures.

Moiré visibility depends on the type of analyser, on the camera's low pass optical filtering and on the spatial frequency of the test pattern analysed.

The TE194 consists of 8 rows of rectangular bars the spatial frequencies of 1, 2, 4, 6, 8, 10, 12 and 14MHz. To adjust the odd frequency values 3 to 13 the picture has to be zoomed in a way that it is limited by the respective markings (arrows) on the upper and bottom edge of the test chart. The frequency then refers to the row with the next lower even frequency each.

Measurement procedures can be made with a spectrum analyser or a wide-band video oscilloscope.

Measurement conditions

Gamma correction: OFF
Contour correction: OFF
olor correction: ON

